



# 構造図(1)


L形溝(250)  
S=1/10  
(S=1/20)




L形溝(300)  
S=1/10  
(S=1/20)




L形溝(350)  
S=1/10  
(S=1/20)




L形溝(250A)  
S=1/10  
(S=1/20)




L形溝(250)  
基礎再利用  
S=1/10  
(S=1/20)




L形溝(300)  
基礎再利用  
S=1/10  
(S=1/20)




L形溝(350)  
基礎再利用  
S=1/10  
(S=1/20)




特殊L形溝(300用)  
S=1/10  
(S=1/20)




街きよ(155-型)  
S=1/10  
(S=1/20)  
平坦部




プレキャストL形溝(300)  
プレキャストL形溝(250)  
S=1/10  
(S=1/20)  
(ベース基礎)

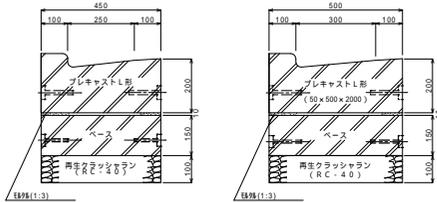


プレキャストL形溝(300)  
S=1/10  
(S=1/20)  
(ベース基礎・斜)

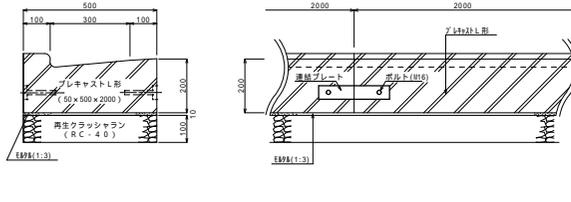


雨水樹  
S=1/10  
(S=1/30)




道路横断面U形溝(場所打ち併用)  
S=1/10  
(S=1/20)




道路横断面U形溝  
(U形300、グレーグ固定式、L=1.0m) S=1/10  
(S=1/20)

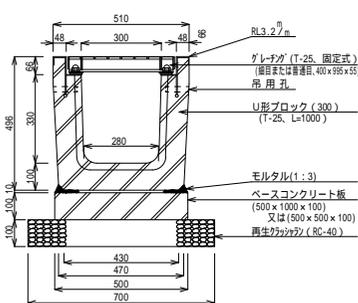


雨水樹(子樹)  
S=1/15  
(S=1/30)

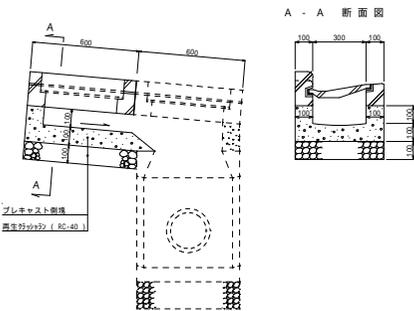


街きよ用集水樹  
S=1/15  
(S=1/30)




街きよ(155型)  
S=1/10  
(S=1/20)  
一般部及び歩行者横断用平坦部




街きよ(155型)  
S=1/10  
(S=1/20)  
車入れ用平坦部




境石  
S=1/10  
(S=1/20)  
乗り入れ部




境石  
S=1/10  
(S=1/20)  
一般部




歩道止石  
S=1/10  
(S=1/20)  
歩行者横断用平坦部





街きよ用集水樹調整  
(155型)  
S=1/15  
(S=1/30)



街きよ用集水樹調整  
(155-型)  
S=1/15  
(S=1/30)



取付管・取付管接続(硬質塩化ビニール管)及び埋戻  
S=1/15  
(S=1/30)



注1:以下の構造については「東京都下水道設計標準」(東京都下水道局)によること。  
 ・雨水樹高さ調整  
 ・L形汚水側溝高さ調整  
 ・円形汚水側溝高さ調整  
 ・人孔高さ調整  
 注2:寸法表示中に記載のないものについては、単位はmm(3桁未満)とする。